


取合フランジ FLANGE CONNECTION

(JPI-7S-15-2011)

JPI150Lb	M	t	R	Q	O
▷ 1/2B	16	9.6	34.9	60.3	90
▷ 3/4B	16	11.2	42.9	69.9	100
▷ 1B	16	12.7	50.8	79.4	110


JPI300Lb	M	t	R	Q	O
▷ 1/2B	16	12.7	34.9	66.7	95
▷ 3/4B	19	14.3	42.9	82.6	115
▷ 1B	19	15.9	50.8	88.9	125

ダイヤル径 DIAL SIZE	C	D	G	S	N	U
▷ φ 100/4"	111	100	70	6	134	118
▷ φ 125/5"	129	119	80	2	150	137
▷ φ 150/6"	161	149	95	6	186	168

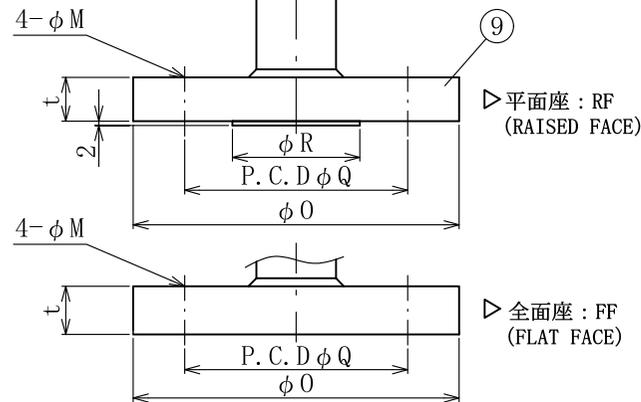

記号 SYM	訂正 REVISION	作成 REV. BY	日付 DATE

注：指定なき寸法許容差は±1.5
ALLOWANCE ±1.5 (EXCEPT APPOINTED SIZE)



9	圧力取出口 CONNECTION	スペックシートを参照 REFER TO SPEC SHEET
8	ダイヤフラム DIAPHRAGM	スペックシートを参照 REFER TO SPEC SHEET
7	蛇管 FLEXIBLE TUBE	304SS
6	キャピラリーチューブ CAPILLARY TUBE	304SS
5	指針 POINTER	ALUM.
4	目盛板 DIAL PLATE	AIP.
3	透明板 WINDOW	安全ガラス SAFETY GLASS
2	ガラス押え BEZEL	304SS
1	ケース CASE	304SS
No.	名称 NAME	材質 MATERIAL

NESS NESSTECH INC.

タイトル
TITLE 隔測型隔膜式圧力計
SEALED DIAPHRAGM GAUGE
WITH I SECTION FLANGE (JPI)

尺度 SCALE	作成 DR. BY	承認 APPD.
f.		

型式 MODEL NO.	PB-TUSS-JPI
図番 DRAWING NO.	