
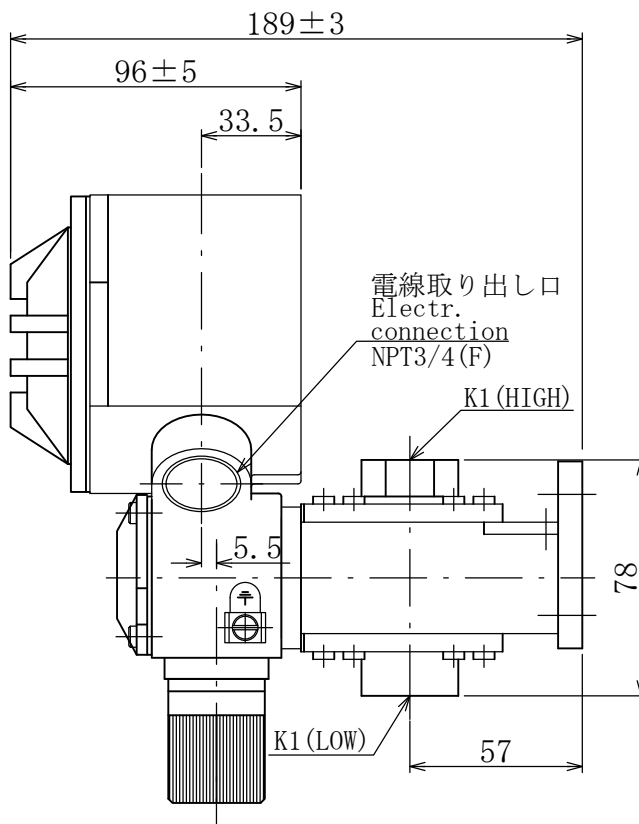


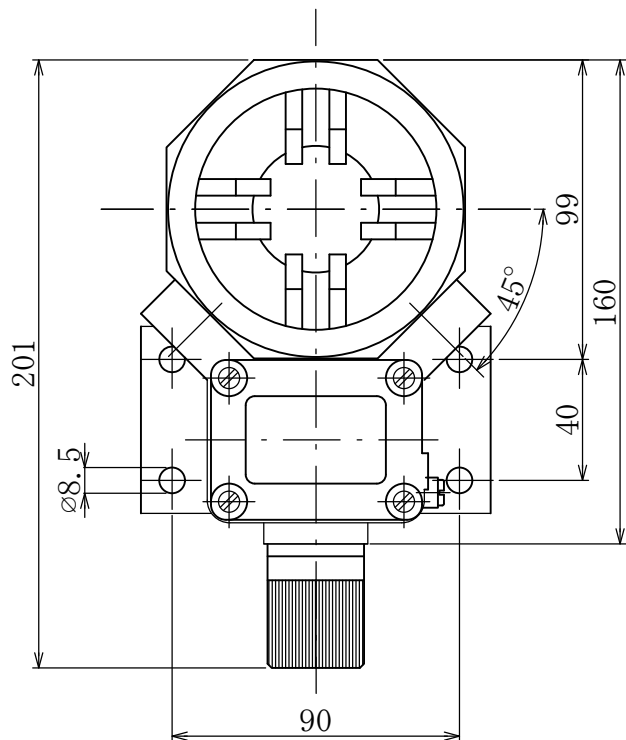

プロセス接続口/PROCESS CONNECTION

型式 MODEL	K1
▷ S2X	Rc1/2
▷ S2N	NPT1/2 (F)
▷ S1X	Rc1/4
▷ S1N	NPT1/4 (F)

レンジコード RANGE CODE	最大静圧 MAX. STATIC PRESSURE
D402M	1MPa (10bar)
D404M	5MPa (50bar)
D406M	
D408M	
D506M	10MPa (100bar)
D508M	
D608M	14MPa (140bar)

御参考図

MOUNTING HOLES :CLEARANCE FOR M8
取付穴寸法 : M8ネジ用

記号 SYM	訂正 REVISION	作成 REV. BY	日付 DATE

注：指定なき寸法許容差は±1.5
ALLOWANCE ±1.5 (EXCEPT APPOINTED SIZE)

防爆構造：耐圧防爆構造
(EXPLOSION-PROOF STRUCTURE:FLAME PROOF ENCLOSURE)

防爆等級：3nG5 (TIIS No. T44765)
(CLASS)

Ex. Class : Ex db IIC T6

ケース材質


CASE MATERIAL : AC

塗装色

CASE COLOR : シルバー/SILVER

SPDT STANDARD

青 BLUE	茶 BROWN	黒 BLACK
○	○	○
NC	NO	C



C : コモン/COMMON
端子図 NO : 常時 開/NORMAL OPEN
WIRING SCHEMATIC NC : 常時 閉/NORMAL CLOSE

NESS NESSTECH INC.

タイトル
TITLE

BETA 差圧スイッチ
BETA DIFFERENTIAL PRESSURE SWITCH

尺度 SCALE	作成 DR. BY	承認 APPD.	
f.			
型式 MODEL NO.	W3-D...M-.1		
図番 DRAWING NO.			