

温圧計〔温度・圧力複合ゲージ〕

直結型 バイメタル式

屋内用




▲ BTP-L : L型

型式	温度範囲	圧力範囲	保護寸法	設置針
BTP-L	1	100	065	0
	(°C)	(MPa)	(mm)	
BTP-L:L型	1:0~50	060:0~0.6	065:65	0:無
BTP-S:立型	2:0~100	100:0~1.0	100:100	1:有
		160:0~1.6		
			N065:保護管無	
			N100:保護管無	




保護管単体型式

BTP-W-65	65mm	BTP-W-100	100mm
----------	------	-----------	-------

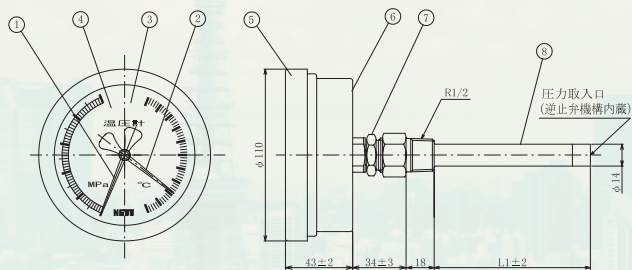

▲ BTP-L

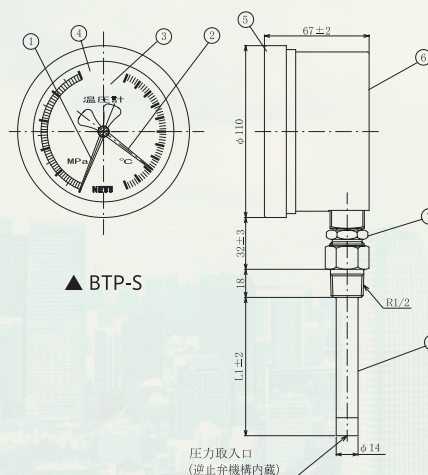


▲ BTP-S

温圧計導入のメリット



従来施工

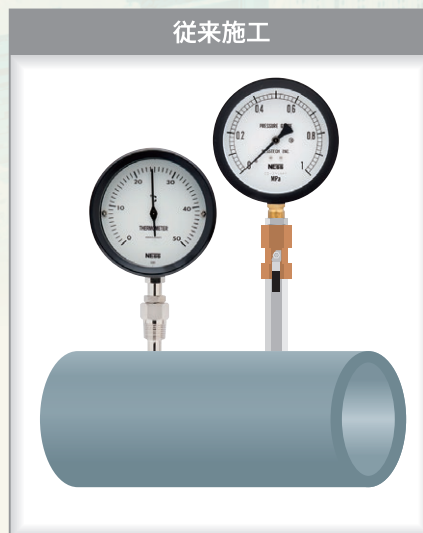

温圧計

